GENERAC

GP SERIES Open Frame Inverter Generator

Features

GP3500iO

- PowerRush™ Advanced Technology delivers over 50% more starting capacity allowing you to do more with less**
- 50% Quieter for noise sensitive environments*
- 25% Lighter reduces fatigue and improves portability*
- True Power™ Technology provides clean, stable power ideal for sensitive electronics, tools and appliances
- PowerDial[™] Choke, Run, Off: Three operation settings integrated into one simple-to-use dial
- Economy Mode automatically adjusts engine speeds to save fuel and reduce sound emissions
- **USB Ports** charge mobile devices including smart phones and tablets
- Parallel Ready connect two GP3500iO inverter generators for twice the power
- Generator Status Lights alert when unit is low on oil, overloaded or ready to use

*Compared to the Generac GP3300

**Increases electrical current upon demand; above rated output when starting electric motors






Model 7668-0 UPC: 696471073102



AC Rated Output Running Watts 3000 AC Maximum Output Starting Watts 3500

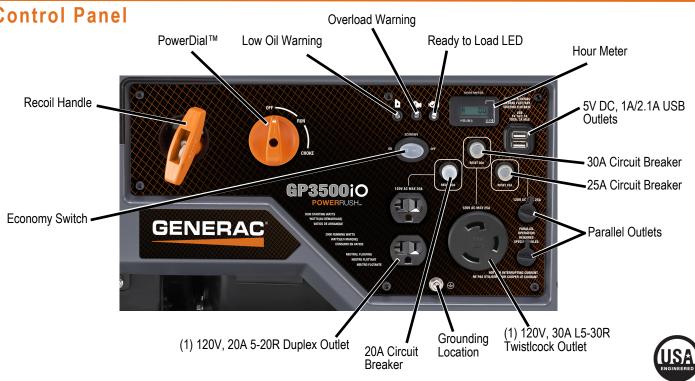

1 of 2 Model 7128-0 UPC: 696471072020

(50-State/CSA)



GP3500iO

2 of 2

C		:::		43		
5 p	ec	ITI	са	τι	0	ns


Product Series	GP3500iO	
Model Number	7128-0	
Configuration	50 ST/CSA	
AC Rated Output Running Watts	3000	
AC Maximum Output Starting Watts	3500	
Rated AC Voltage	120 VAC	
Rated AC Frequency	60 Hz	
Rated 120 VAC Amperage	25	
Engine Displacement	212cc	
Engine Type	OHV	
Engine RPM	Variable	
Recommended Oil	10W-30 / SAE 30	
Oil Capacity qt (L)	0.6 (0.6)	
Lubrication Method	Splash	
Choke Location	Integrated into PowerDial™	
Fuel Shut Off	Integrated into PowerDial™	
Starting Method	Recoil Pull Start	
Low Oil Shutdown	Yes	
Neutral Bonded to Ground	No	

Floating Neutral	Yes
Start Switch Type	PowerDial™
Start Switch Location	On Control Panel
Fuel Tank Capacity gal (L)	2.37 (9)
Run Time at 50% of Rated Load (Hours)	8
Run Time at 25% of Rated Load (Hours)	11
Warranty- Residential	3 Year Limited
Warranty- Commercial	1 Year Limited
Included	Engine oil, oil funnel, tool kit and Owner's Manual

Product Series	Inverter Parallel Kit (sold separately)
Model	7668-0
Receptacle Type	(1) 120V 50A 14-50R (1) 120V 30A TT-30R (RV)
Rated 120 VAC Amperage	50 Amp
AC Rated Voltage	120 V
Warranty- Residential	90 Day Limited
Warranty- Commercial	90 Day Limited

Inverter Parallel Kit (sold separately) Length in (mm) 9.84 (250) 4.33 (110) Width in (mm) Height in (mm) 8.27 (210) Carton Length in (mm) 11.02 (280) Carton Width in (mm) 9.37 (238) Carton Height in (mm) 6.10 (155) Unit Weight lbs (kg) 3.53 (1.6) 3.8 (1.75) Shipping Weight lbs (kg)

Width

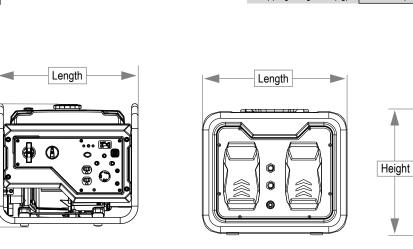



Height

Girasol No. 551, Col. Mariano Otero CP 45067, Zapopan, Jalisco. Móvil: 333552 6788 / mail: contacto@salogenergy.com

GP3500iO	
Length in (mm)	19.3 (490)
Width in (mm)	16.9 (430)
Height in (mm)	16.4 (417)
Carton Length in (mm)	19.8 (502)
Carton Width in (mm)	17.5 (445)
Carton Height in (mm)	18.1 (460)
Unit Weight Ibs (kg)	74.3 (33.7)
Shipping Weight lbs (kg)	80.7 (36.6)

Width

Dimensions and Weights